



CATALOGUE

Catálogo/ Catálogo/ Katalog/ Catalogue/ Catalogo/ Katalog/ Каталог/ كاتالوج/ Sách Mục Lục/ Katalog / カタログ/ 카탈로그/ 產品目錄/ 产品目录



DS900PRO

TEMPERED GLASS SIDE PANEL
LUXURY PC CHASSIS

1. PRODUCT INFORMATION

1.1 Accessory Box.....	03
1.2 Specification Sheet.....	04

2. COMPONENTS AND PORTS

2.1 Product Multi-View.....	05
2.2 Exploded View	06
2.3 Cable Connections	07
2.4 Button And I/O	08
2.5 Panel Disassembly And Assembly	09
2.6 Motherboard Installation	10
2.7 Fans Installed	11
2.8 Radiator Installed	12
2.9 CPU Cooler Support	13
2.10 Power Supply Installation	14
2.11 Graphics Card Installation	15
2.12 Remove The SSD / HDD Tray	16
2.13 Hard Disk Installation	17

2.1 PRODUCT MULTI-VIEW05

Product Multi-View/ Vistas Múltiples del Producto/ Mehrere Ansichten des Produkts/ Vues multiples du produit/ Viste multiple del prodotto/ Viele widoków produktu/ Многократные виды продукта/ چند دیدگاه دیدگاه / Nhiều góc nhìn sản phẩm/ Beberapa Tampilan Produk/ 製品マルチビュー- / 제품 멀티뷰/ 產品多視圖/ 产品多视图



1.1 ACCESSORY BOX03

Caja de Accesorios/ Caixa de Acessórios/ Zubehörkasten/ Boîte d'accessoires/ Scatola degli Accessori/ Pudełko z Akcesoriami/ Коробка с аксессуарами/ تاقچه لوازم / Hộp Phụ Kiện/ Kotak Aksesoris/ アクセサリーボックス/ 액세서리 박스/ 配件盒/ 配件盒



Instructions

1. Each press of the button toggles the light effect, supporting 18 different modes.
2. Can be connected to 2-pin interfaces (such as LED or RESET interfaces) for control.
3. Press and hold for more than 3 seconds: the white light of the connected fan will flash, and the light effect will be turned off.


1.2 SPECIFICATION SHEET04

Hoja de Especificaciones/ Folha de Especificações/ Spezifikationsblatt/ Fiche Technique/ Foglio di Specifiche / Arkusz Specyfikacji/ Лист спецификаций/ تابلو مواصفات / Bảng Thông Số Kỹ Thuật / Trang Phụ Lục Thông Số/ Lembar Spesifikasi/仕様書/ 사양서/ 規格表 / 规格表

Model Name	DS900 PRO
Color	Black/White
Steel Thickness	Chassis : 0.5mm SPCC
Motherboards	ATX / M-ATX /ITX
Overall size	434(L)*218(W)*455(H)mm
3.5" Drive Bays	3.5 "internal for H.D.D" 2 PCS(max)
2.5" Drive Bays	2.5 "internal for S.S.D" 2 PCS(max)
Expansion Slots	7 Slots
GPU Clearance	VGA card : 425mm length(max)
CPU Clearance	CPU cooler : 170mm height(max)
Cooling System	Top :120mm*3/140mm*2 Side :120mm*3 Rear :120mm*1 Bottom :120mm*2(P.S.U COVER)/120mm*1(BRACKET)
Radiator Suppor	Side :120/240 Top :120/240/360 Rear: 120
I/O Port	Type-C*1 (optina)/USB3.0*1/USB2.0*1/ LEDHD Audio / Power /Reset
Power Supply	Bottom, ATX 250mm
Front/Left Panel	Tempered Glass

2.2 EXPLODED VIEW06

Vista Explosiva/ Visão Explosiva/ Explosionszeichnung/ Vue Éclatée/ Vista Spaccata/ Widok Wyburzony / Взрывной Вид / انفجار دیدگاه / Hình Ảnh Phá Tách / Gambar Ledakan / 分解図/ 분해도/ 分解圖 / 分解圖

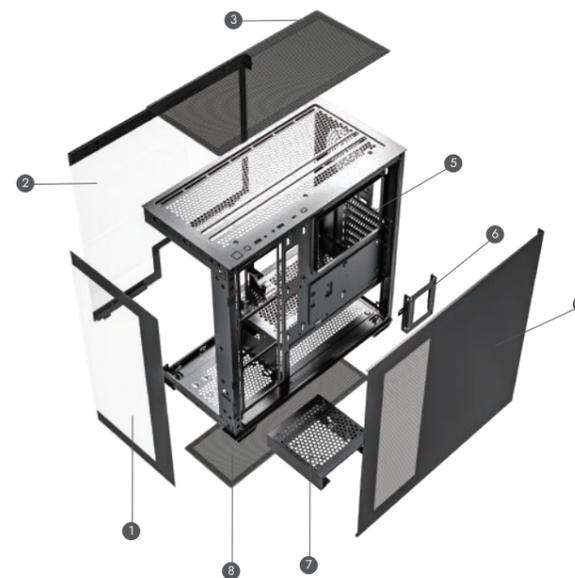

No. PART NAME

- | | |
|-------------------|----------------------|
| 1.Front panel | 5.Pcie Slot Cover |
| 2.Left panel | 6.Storage Drive Tray |
| 3.Top dust filter | 7.Storage Drive Tray |
| 4.Right panel | 8.Bottom dust filter |

2.3 CABLE CONNECTIONS07

Conexiones de cables/ Conexões de cabos/ Kabelverbindungen/ Connexions de câbles/ Connessioni dei cavi/ Połączenia kablowe/ Кабельные соединения/ تاقچه اتصال / Két nối cáp/ Koneksi kabel/ ケーブル接続/ 케이블 연결/ 電纜連接/ 电纜連接


Output Cable Ports



MotherBoard

2.4 BUTTON AND I/O08

Interfaz de ES/ Interface de ES/ IO-Schnittstelle/ Interface ES/ Interfaccia IO/ Interfejs Wejścia/Wyjścia / Интерфейс ввода-вывода/ واجهة إدخال / Giao diện IO/ Antarmuka IO/ IO 인터페이스 / IO 介面 / IO 界面

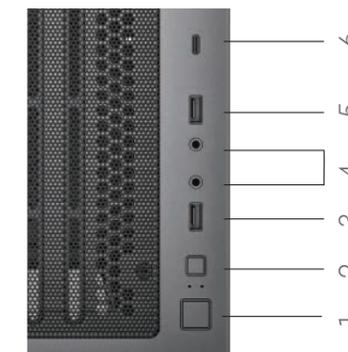

No. PART NAME

- | |
|--------------------|
| 1.Power |
| 2.Reset |
| 3.USB2.0*1 |
| 4.HD Audio |
| 5.USB3.0*1 |
| 6.TPYE-C*1(Optina) |



www.darkflash.com

Fly beyond limits!



DARKFLASH INFOTECH CO., LTD.
www.darkflash.com

f facebook.com/darkFlash.global/
i instagram.com/darkflash_official/
d darkflash_official

